

Wallmaster™ HPS/PSMH Luminaires

Vertical and Horizontal Wall Mount

50 W, 75 W, 100 W, 150 W HPS; 70 W, 100 W PSMH.

Applications

- Totally enclosed luminaires for public security installations. Tough polycarbonate refractor provides vandal resistance.
- Ideal where illumination over wide areas adjacent to walls is required. Applications include walkways, parking lots and garages, building exteriors, shopping centers, stores, restaurants, tunnels, underpasses, loading docks, ramps, security lighting areas, entrances and recreational areas.

Features

- Computer designed optical system. Reflector provides optimum down and out light distribution. Prismatic refractor provides soft light with even distribution, reducing glare.
- Contemporary architectural design with attractive bronze polyester finish. Soft, diffused light enhances the beauty of any architectural setting.
- Enclosed and gasketed for use in wet locations—indoors and out. High temperature neoprene gasketing.
- Easy to maintain. Hinged lens frame swings open (just loosen two captive bolts) for fast, easy relamping and access to internal components.
- Quick, easy installation. Fixture bolts to any flat surface or any standard 3" or 4"/76.2 or 101.6 mm outlet box for vertical mounting.
- High energy efficiency. High pressure sodium lamps use approximately one-fourth as much electrical energy as incandescent lamps.
- Pre-wired, integrally ballasted.
- Complete assemblies available with a choice of ballasts: high reactance high power factor—with or without photocontrol (automatic ON-OFF operation). High power factor ballasts provide a minimum 90% P.F. and are suitable for use in high ambient temperature areas. High reactance high power factor ballasts are single-tap (120 or 480 Vac), dual tap (120/277 Vac) and multi-tap (120-277 Vac). Reactor and reactor high power factor ballasts are 120 Vac.
- Glass thermal barrier in 100 W and 150 W units protects polycarbonate lens from heat for longer lens life.
- Tough, molded polycarbonate refractor provides cool fixture operation.
- Three knockouts provided for conduit and wiring.
- Medium base porcelain socket with spring loaded nickel plated contacts.

Standard Materials

- Ballast housing and wall bracket: aluminum
- Hinged lens assembly: high Impact, non-solarizing, polycarbonate
- Reflector: aluminum

Standard Finishes


- Ballast housing, wall bracket: two-coat bronze polyester finish
- Reflector: natural finish

Options

- Photocontrol provides automatic ON-OFF operation. Order luminaires with **-PC** suffix or add **-PC** suffix to any 120 Volt luminaire catalog numbers.



Dimensions

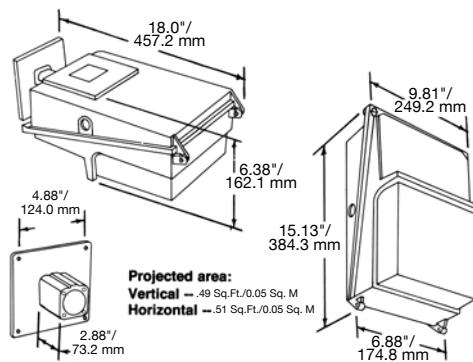

Certifications and Compliances

- UL Standard: E85142
- UL Standard: 1598
- CSA Certified: LR9349

[†] For multi-tap ballast specify voltage to be used.


Wallmaster™ HPS/PSMH Luminaires

Vertical and Horizontal Wall Mount

50 W, 75 W, 100 W, 150 W HPS; 70 W, 100 W PSMH.

Description	Line Voltage	Vertical Mount	Catalog Number	Horizontal Mount	Vertical Mount 
50-Watt High Pressure Sodium					
Reactor Ballast 	120 V	G-WM130L-12R	G-WM134L-12R	G-WMM50L-R1 	
Reactor Ballast, High Power Factor 	120 V	G-WM130L-12RH	G-WM134L-12RH	G-WMM50L-H1 	
70-Watt High Pressure Sodium					
High Reactance Ballast, High Power Factor	120/208/240/277 V	G-WM230L-MT	G-WM234L-MT	G-WMM70L-MT  	
High Reactance Ballast, High Power Factor	480 V	G-WM230L-48	G-WM234L-48	Not Available	
Reactor Ballast 	120 V	G-WM230L-12R	G-WM234L-12R	G-WMM70L-R1 	
Reactor Ballast, High Power Factor 	120 V	G-WM230L-12RH	G-WM234L-12RH	G-WMM70L-H1 	
100-Watt High Pressure Sodium					
High Reactance Ballast, High Power Factor	120/208/240/277 V	G-WM330L-MT	G-WM334L-MT	G-WMM10L-MT  	
High Reactance Ballast, High Power Factor	480 V	G-WM330L-48	G-WM334L-48	Not Available	
Reactor Ballast 	120 V	G-WM330L-12R	G-WM334L-12R	G-WMM10L-R1 	
Reactor Ballast, High Power Factor 	120 V	G-WM330L-12RH	G-WM334L-12RH	G-WMM10L-H1 	
150-Watt High Pressure Sodium					
High Reactance Ballast, High Power Factor	120/208/240/277 V	G-WM430L-MT	G-WM434L-MT	Not Available	
High Reactance Ballast, High Power Factor	480 V	Not Available	Not Available	Not Available	
Reactor Ballast 	120 V	G-WM430L-12R	G-WM434L-12R	G-WMM15L-R1 	
Reactor Ballast, High Power Factor 	120 V	G-WM430L-12RH	G-WM434L-12RH	G-WMM15L-H1 	
70-Watt Pulse Start Metal Halide					
High Reactance Ballast, High Power Factor	120/208/240/277 V	G-WM230H-MT	G-WM234H-MT	G-WMM70H-MT  	
100-Watt Pulse Start Metal Halide					
High Reactance Ballast, High Power Factor	120/208/240/277 V	G-WM330H-MT	G-WM334H-MT	G-WMM10H-MT  	

Wall Mounting Kit

Dimensions	Description	Catalog Number
	Adapts vertical mount fixtures to horizontal position.	G-WM-HMK

 ^① Add suffix **-PC** for Photocontrol. Provides automatic dusk-to-dawn ON-OFF operation. Specify voltage to be used with photocell, if used with multi voltage ballast.

 ^② Change the **-MT** suffix to **-TT** for tri-tap 120/277/347 V 

 ^③ CSA Certification only.

Wallmaster™ HPS/PSMH Luminaire Electrical Specifications

Vertical and Horizontal Wall Mount

50 W, 75 W, 100 W, 150 W HPS; 70 W, 100 W PSMH.

Line Voltage	Type of Ballast	Starting Amps	Operating Amps	Total Watts
50-Watt High Pressure Sodium				
120	Reactor	1.80	1.18	60
120	Reactor, High Power Factor	0.75	0.55	60
70-Watt High Pressure Sodium				
120/208/240/277	High Reactance, High Power Factor	0.75/0.35	0.81/0.35	91
480	High Reactance, High Power Factor	0.21	0.21	94
120	Reactor	2.25	1.70	87
120	Reactor, High Power Factor	0.85	0.75	82
100-Watt High Pressure Sodium				
120/208/240/277	High Reactance, High Power Factor	1.30/.60	1.15/0.50	130
480	High Reactance, High Power Factor	0.33	0.31	135
120	Reactor	3.05	2.40	115
120	Reactor, High Power Factor	1.50	1.05	115
150-Watt High Pressure Sodium				
120/208/240/277	High Reactance, High Power Factor	2.00/0.85	1.65/.72	188
480	High Reactance, High Power Factor	0.50	0.47	189
120	Reactor	4.55	3.40	170
120	Reactor, High Power Factor	2.20	1.50	170
70-Watt Pulse Start Metal Halide				
120/208/240/277	High Reactance, High Power Factor	0.80/0.39	0.85/0.39	95
100-Watt Pulse Start Metal Halide				
120/208/240/277	Constant Wattage Auto transformer (CWA)	1.22/0.44	1.15/0.50	128