


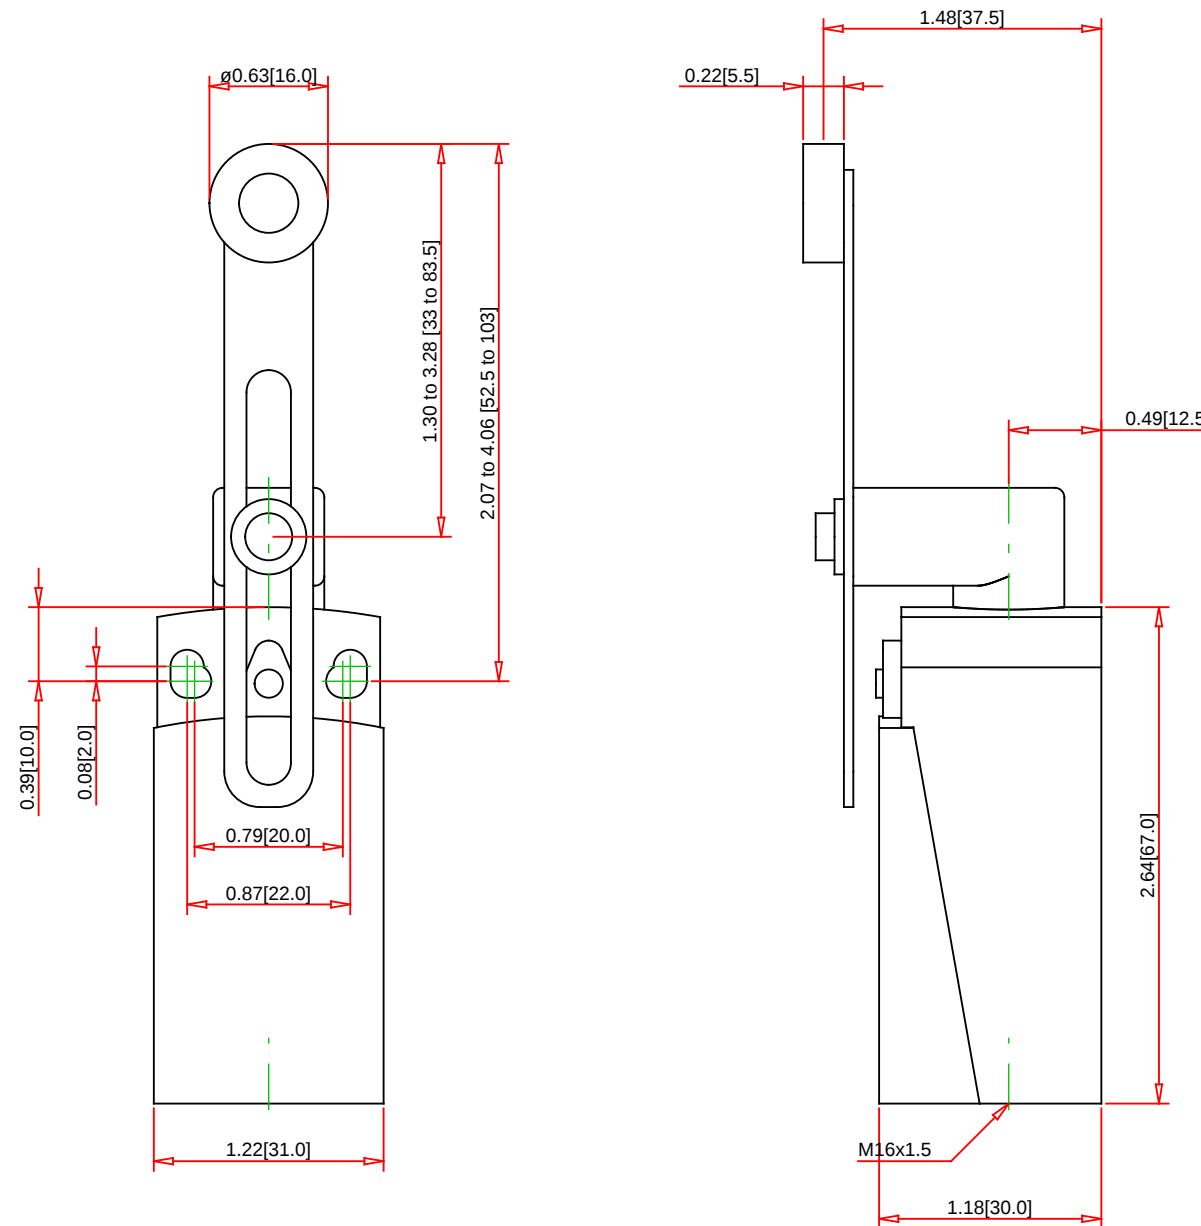

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XCKD2145P16



Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type: Screw Clamp
Enclosure Rating: NEMA 1/2/4/6/12/13; IP66/67
Approvals: UL # E164353 - CSA # 164581 - CE Marked
Weight: 0.235 kg (0.518 lb)
Conforming to Standards: CENELEC EN 50047
RoHS: Yes
Operating Temperature Range: -13 to 158 ° F
Shock Resistance: 50G
Vibration Resistance: 25G
Max. Actuation Speed : 1.5 m/s
Repeat Accuracy:
Operating Torque/Force: 14.16 Inch-Ounces (0.10Nm)

Specification:

Description: XCKD Limit Switch Variable length plastic roller lever, rigid
Body Style/Type Description: IEC OsiSense Limit Switches XCKD Compact Modular 31mm Metal Body
Head Type: ZCE01 Rotary+ZCY45 Variable length plastic roller lever, rigid
Lever Arms: ZCY45 Variable length plastic roller lever, rigid
Body with Contact Type: ZCD21 2-pole N.O./N.C. snap action
Conduit Thread: ZCDEP16 ISO M16x1.5
Ampere Rating Continuous: 10A
Maximum Voltage Rating: 240VAC/250VDC
Actuation: CW and CCW
Actuator Action: Momentary
Lever Arm Length: 33 to 83.5mm
Roller Dimension: 16 x 5.5mm
Roller Material: Thermoplastic
Contact Configuration: 1 N.O./1 N.C.
Contact Operation: Snap Action
Connection Type: Conduit Entrance (ISO M16x1.5)
Head Material: Zamak
Positive Opening: Yes
Cable Length: